

06-13-00

ASSISTANT COMMISSIONER OF PATENTS AND TRADEMARKS
Washington, DC 20231

PATENT

Date: June 12, 2000
File No. 0414.63308

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Bruce McKendry, Jim Mielke,
Briant Benson and Bruce Fields

For:

I hereby certify that this paper is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Asst. Comm. for Patents, Washington, D.C. 20231, on this date.

June 12, 2000
Date

Express Mail Label No.: EL409491869US

Enclosed are:

- (X) 25 pages of specification, including 22 claims and an abstract.
- () an executed oath or declaration, with power of attorney.
- (X) an unexecuted oath or declaration, with power of attorney.
- (X) 9 sheet(s) of informal drawing(s).
- () sheet(s) of formal drawings(s).
- () Assignment(s) of the invention to _____.
- () Assignment Form Cover Sheet.
- () A check in the amount of \$_____ to cover the fee for recording the assignment(s) is enclosed.
- () Information Disclosure Statement.
- () Form PTO-1449 and cited references.
- () Associate power of attorney.
- () Priority Document.

Fee Calculation For Claims As Filed

a) Basic Fee					\$ 690.00
b) Independent Claims	<u>11</u>	-	3	=	<u>8</u> x \$ 78.00 = \$ <u>624.00</u>
c) Total Claims	<u>22</u>	-	20	=	<u>2</u> x \$ 18.00 = \$ <u>36.00</u>
d) Fee for Multiple Claims					\$260.00 = \$ _____

Total Filing Fee \$1,350.00


- () Statement(s) of Status as Small Entity, reducing Filing Fee by half to \$ _____
- () A check in the amount of \$_____ to cover the filing fee is enclosed.
- () ~~The Commissioner is hereby authorized to charge any additional fees which may be required to this application under 37 C.F.R. §§1.16-1.17, or credit any overpayment, to Deposit Account No. 07-2069. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 07-2069. A duplicate copy of this sheet is enclosed.~~

Suite 8660 - Sears Tower
233 S. Wacker Drive
Chicago, Illinois 60606
(312) 993-0080

GREER, BURNS & CRAIN, LTD.

By: Jonathan D. Feuchtwang
Registration No. 41,017

06/12/00
Date


Express Mail Label No.: EL409491869US

APPARATUS FOR EXPRESSING MILK

1 This is a continuation-in-part of provisional application Serial No.
2 60/140,902 filed June 23, 1999.

3 FIELD OF THE INVENTION

4 This invention relates to apparatus for extracting natural milk, and more
5 particularly, to breast pumps which are convenient and comfortable to use.

6 BACKGROUND OF THE INVENTION

7 Pumps for expressing milk from breasts are well-known. One known breast
8 pump is disclosed in Whittlestone U.S. Patent No. 4,607,596.

9 The Whittlestone patent discloses a breast pump having two milk collectors
10 connected to a pump which applies both a vacuum and pulsating pressure to the breasts
11 to extract milk. The pulsating pressure massages the breast to stimulate milk production,
12 and the vacuum secures the milk collectors to the breasts and helps draw the milk and
13 collect it. However, the vacuum at the two collectors can only be adjusted at the pump,
14 and cannot be individually adjusted. This can create discomfort for the user if one breast
15 is more sensitive than the other, or responds to stimulation differently than the other.
16 Thus, there is a need for breast pumps having individual control of two collectors, which
17 is more comfortable for the user.

1 The Whittlestone patent does not disclose a vacuum release for the
2 collectors. As a result, when the device is turned off, the vacuum is broken by pulling the
3 collectors from the breasts, or waiting for the vacuum to dissipate in order to remove the
4 collectors. This is inconvenient and sometimes uncomfortable. Thus, there is a need for
5 breast pumps having a vacuum release, preferably in a convenient location such as the
6 collectors themselves.

7 In the Whittlestone device, milk from the two collectors is commonly drawn
8 into a first collection vessel, and then a second collection vessel. The milk is drawn
9 through vacuum lines, though, which makes cleaning difficult. Moreover, the milk
10 collecting vessels are reusable, and require frequent and thorough cleaning. Accordingly,
11 there is a need for breast pumps which are more sanitary and easier to clean than the
12 Whittlestone device.

13 The Whittleson patent discloses a breast cup having a housing, a relatively
14 soft inner ring or donut, and a flexible liner. The liner wraps around the outlet of the cup,
15 and a bung is inserted into the cup outlet to pass the vacuum and milk. At the inlet side,
16 the liner is simply folded over the outside of the housing. This design has limitations.
17 The liner is not accurately aligned and reliably sealed on the inlet side, so moisture and
18 other contaminants can get inside the liner, which is undesirable. At the outlet, the liner
19 can collapse around the entire breast, including the tip of the nipple, which can be
20 uncomfortable and can cause unnecessary trauma. Accordingly, there is a need for breast
21 pumps having cups which better fix the liner to the housing. There is also a need for

1 breast pump cups which protect at least the end of the nipple from discomfort due to
2 pulsating pressure.

3 The breast pump disclosed in the Whittlestone patent is a diaphragm pump
4 operated by an electric motor. Rotation of the motor shaft is translated into back and
5 forth action by a somewhat large and cumbersome linkage which moves the diaphragm.
6 This adds not only size but weight to the pump, as well. This is a problem because
7 storage and portability are desirable to breast pump users. Thus, there is a need for breast
8 pumps which are lighter and smaller than known devices.

9 Accordingly, one object of this invention is to provide new and improved
10 apparatus for extracting milk from breasts.

11 Another object is to provide new and improved breast pumps which are
12 more convenient and comfortable to use.

13 Another object is to provide new and improved breast pumps having
14 collectors with individual vacuum adjustments for each collector, and at least one vacuum
15 release.

16 Still a further object is to provide new and improved breast pumps which
17 are more sanitary, easy to clean and easy to disassemble and assemble.

18 Another object is to provide new and improved breast pumps which are
19 more comfortable to use.

20 Yet another object is to provide new and improved breast pumps which are
21 relatively light, compact and portable.

SUMMARY OF THE INVENTION

A device for expressing milk from one or both breasts has at least one milk collector and a pump. Preferably, the device has first and second collectors (also called expressors), so that both breasts can be milked simultaneously. Each expressor has a cup assembly which fits on the breast, a pulsation port to which a supply of pressurized pulsating air is connected, and a vacuum port to which a vacuum supply is connected. The pulsating air and vacuum are created by the pump. In use, pulsating air massages the breast and stimulates milk production, while the vacuum secures the collector on the breast and helps express the milk from the breast.

A vacuum adjustment is provided on each collector, and a vacuum release is provided on one, and preferably each collector. In this manner, the vacuum can be individually adjusted, and easily released.

The collectors also include a cap and manifold which direct the vacuum and pressure, a cup assembly which is preferably press fit onto the manifold, a collection vessel secured to the bottom of the manifold, and a one-way check valve or the like between the manifold and the collection vessel. After passing through the vacuum adjustment, the vacuum is directed through the cap and manifold, collection vessel and cup assembly so that the milk is drawn into the collector with little or no milk entering the vacuum lines to the pump. A filter may be provided for extra isolation of the vacuum pump and vacuum lines, if desired.

1 The cup assembly includes a bell housing, a relatively soft donut shaped
2 pad, and a flexible liner, preferably made of silicone. The liner is secured to the inlet side
3 of the cup assembly by a locking type of attachment, and extends around the bottom or
4 lower end of the case, where it is secured by another locking press fit configuration.

5 The bottom end of the case fits into a receptacle in the manifold. The
6 receptacle has a boss which extends into the cup assembly by a desired distance. This
7 boss prevents the liner from collapsing around the end of the nipple during use.

8 The collector can be easily disassembled and cleaned in a dishwasher or the
9 like, by removing the collection vessel and using or storing the milk, removing the cap
10 and vacuum adjustment/release valve, and then removing the cup assembly. The cup
11 assembly can be cleaned without removing the liner, if desired, or the liner can be
12 removed and cleaned separately, or replaced. A cleaning cap can be placed over the air
13 pulsation port of the cup assembly when the cup assembly is cleaned in its assembled
14 condition, to prevent water from entering the space between the liner and the case.

15 The manifold, cap and valve can also be washed. The cup assembly can be
16 easily reassembled after cleaning by reinserting the cup assembly in the manifold, re-
17 attaching the cap to the manifold and cup assembly, and securing another collection
18 vessel to the bottom of the manifold, with the check valve.

19 The pump includes a movable diaphragm in a chamber. The diaphragm is
20 oscillated back and forth by a linear actuator motor such as a stepper motor. The motor
21 preferably has a shaft which does not rotate, but moves back and forth axially. The shaft

1 of the motor is directly or nearly directly linked to the diaphragm, which eliminates
2 complex and cumbersome linkage components, reducing the size and weight of the pump.

3 BRIEF DESCRIPTION OF THE DRAWINGS

4 The above mentioned and other features of this invention and the manner
5 of obtaining them will become more apparent, and the invention itself will be best
6 understood with reference to the following description of an embodiment of the invention
7 taken in conjunction with the accompanying drawings, in which:

8 Fig. 1 is a partially cut-away perspective view of apparatus made in
9 accordance with the principles of this invention;

10 Fig. 2 is a milk collector used in the apparatus of Fig. 1, shown in cross-
11 section;

12 Fig. 3 is a top view of the milk collector of Fig. 2, taken along lines 3-3 in
13 Fig. 2;

14 Fig. 4 is an exploded view of a cup assembly used in the collector of Fig.
15 2;

16 Fig. 5 is an exploded view of the collector of Fig. 2;

17 Fig. 6 is a cut-away view of the collector of Fig. 2, showing the liner in a
18 collapsed condition;

19 Fig. 7 is a cut-away view of a vacuum adjustment/release assembly in the
20 collector of Fig. 2;

1 Fig. 8 is a cut-away view of an alternate embodiment of the pump used in
2 the apparatus of Fig. 1;

3 Fig. 9 is a block diagram of a control system for the apparatus of Fig. 1;

4 Figs. 10 and 11 are diagrams of an alternate embodiment of the diaphragm
5 used in the pump in the apparatus of Fig. 1;

6 Fig. 12 is a perspective view of another embodiment of the collecting vessel
7 of Fig. 2 as a flow-through bag;

8 Fig. 13 is a perspective view of the annular ring of Fig. 12;

9 Fig. 14 is an exploded perspective view of the flow-through bag connection
10 mechanism; and

11 Fig. 15 is a cross-sectional side view of the flow-through bag as an integral
12 unit.

13 DETAILED DESCRIPTION

14 Referring to Fig. 1, apparatus 10 is provided for expressing milk from one
15 breast, or from two breasts simultaneously. The apparatus 10 includes a first collector or
16 expressor 12 and a second expressor 14. A pump 16 is connected to both expressors 12,
17 14 through vacuum lines 18, 20, and air pressure lines 22, 24.

18 The pump 16 creates a vacuum which engages the breasts, and contributes
19 to drawing the milk from the breasts. The pump also creates pressure pulsation around
20 the areola and some or all of the nipple, as will be seen. The pump 16 can be powered
21 by line voltage, a battery, manually or the like.

1 The expressors 12, 14 are shown in greater detail in Figs. 2 and 3. Each
2 expressor includes a manifold 26, a cup assembly 28 which fits over a breast, a cap 30,
3 a vacuum adjustment release valve assembly 32, a collection vessel 34 and a valve 36.
4 The collection vessel can be a bottle made of plastic-like material or the like, or a bag, as
5 will be seen, as can be oriented at an obtuse angle with respect to the cup assembly, as
6 shown.

7 The manifold 26 includes an opening 38 which is preferably threaded, so
8 that a collection vessel such as a plastic milk bottle can be threadedly secured to the
9 manifold 26, with the valve 36. The valve 36 is preferably a one-way check valve such
10 as a duck bill valve or the like.

11 A vacuum enters the expressor through a vacuum port 40 in the assembly
12 32. After passing through a port 42 in the cap 30, the vacuum enters a vacuum path in the
13 manifold 26 through an opening 44 in the top of the manifold. The vacuum is drawn
14 through an internal orifice 46 to the opening 38, which is beneath the port 42 and the cup
15 assembly 28. The vacuum tends to close the valve 36, which prevents a substantial
16 buildup of vacuum in the collection vessel 34.

17 The vacuum is drawn from the opening 38 to a cup assembly opening or
18 milk outlet port 48 through a channel 50. When milk is drawn from the breast, the milk
19 passes through the channel 50 under the force created by the vacuum, but most of the
20 milk drops into the valve 36 through the force of gravity, and does not enter the orifice
21 46. When sufficient milk collects in the valve 36, the weight of the milk forces the valve

1 open, which releases the milk into the collection vessel 34. In this manner, the milk is
2 collected without contaminating the vacuum lines 18, 20 (Fig. 1).

3 The cup assembly 28 has an milk inlet port 52 in addition to the outlet port
4 48. The components of the cup assembly 28 include a bell housing 54, a donut shaped
5 pad 56, and a flexible liner 58, shown disassembled in Fig. 4. The cup assembly 28 also
6 has an air pressure pulsation port 60 which allows air to enter a space 62 between the case
7 bell housing 54 and the liner 58.

8 The cup assembly 28 is assembled by placing the donut shaped pad 56 in
9 the housing 54 as shown, and does not need further securement. The pad 56 is preferably
10 made of a suitable foam material which is sized to fit snugly in the housing 54. However,
11 the pad 56 can be easily removed by placing a finger through the opening in the ring and
12 pulling the ring out.

13 The liner 58 is installed in the cup assembly 28 by securing an end 63 to the
14 liner 58 in a groove 64 formed in the housing 54 (Figs. 2, 3 and 4). The end 63 and
15 groove 64 are shaped to provide locking press fit type of securement.

16 The liner 58 extends from the groove 64 over and around the pad 56 and
17 inside of the housing 54 to a bottom end 66 of the housing 54. An end 68 of the liner 58
18 is inserted into a groove 70 near the end 68 for securement in a press fit fashion. The
19 liner 58 can be any suitable shape, including the shape shown in Fig. 2, which includes
20 a relatively narrow section 72 near the inlet opening 52, and a wider section 74 between
21 the section 72 and the outlet end 48 of the cup assembly 28. This shape places more

1 pressure around the areola region of the breast, while placing less pressure on the nipple
2 itself.

3 By sealing the liner to the case at both ends, the assembly can be washed
4 without taking the liner off, if a cleaning cap 75 is placed over the pressure inlet 45 (Fig.
5 4).

6 The cup assembly 28 can be press fit into a circular groove 76 in the
7 manifold 26, seen in Fig. 5. The groove 76 is formed by an outside wall 78 and an inside
8 boss 80. The boss 80 can extend outwardly as far as desired, and can be any suitable
9 shape, such as circular, triangular, square, rectangular, elliptical, hexagonal, etc. Since
10 the boss 80 is hollow and prevents the liner 43 from collapsing under outside air
11 pressure, the boss 80 protects any part of the nipple which is inside the boss from pressure
12 when the liner is collapsed, as seen in Fig. 6.

13 The cap 30 (Figs. 2, 3 and 5) includes an air pressure/pulsation channel 82,
14 which extends from an air pressure inlet 84 in the assembly 32 to the port 60. The cap
15 30 can be press fit over the manifold opening 44 and the cup assembly air
16 pressure/pulsation port 60, and can be easily removed. When installed, the cap 30 further
17 secures the cup assembly in the manifold, but both the cap and the manifold can be
18 removed without tools for cleaning purposes. The cap itself can be easily cleaned in a
19 dishwasher or the like by removing the vacuum adjustment/release assembly 32, if
20 desired, which is preferably press fit into the cap 30. The cap may have a filter (not
21 shown) to further prevent liquids or the like from entering the vacuum lines and the pump.

1 The vacuum adjustment assembly 32 includes a housing 86, a thumbwheel
2 88, a pin 90, and a cap 92, shown in Fig. 7. The thumbwheel 88 has threads 94 which
3 adjustably secure the thumbwheel 88 in an orifice 96 in the housing 86. A threaded insert
4 97 can be secured in the orifice 96 for this purpose. An O-ring 98 maintains the vacuum
5 in the line 40.

6 An end 100 of the pin 28 at least partially enters the vacuum port 40 to
7 regulate the vacuum. The vacuum to the expressors is cut off when the end 100 is pressed
8 against a valve seat 101.

9 The cap 92 is secured to the pin 90 by adhesive or the like. The pin 90 is
10 preferably biased away from the port 40 by a spring 102, which presses the cap 92 away
11 from the thumbwheel 88 and normally opens the vacuum port 40 when the pin 90 is
12 released. The port 40 is opened to a desired extent by turning the thumbwheel 88 until
13 a suitable vacuum level is set. A mylar or other suitable gasket 103 between the end 100
14 and the thumbwheel 88 prevents undesired loss of vacuum through the assembly 32.

15 The spring 102 allows the pin 90 to be pressed down so that it releases the
16 vacuum in the cup assemblies 28 when the seal created by the gasket 103 is broken. The
17 vacuum at both expressors 12, 14 can be released by pressing the vacuum release on one
18 or both of the expressors.

19 Referring again to Fig. 1, the pump 16 has two halves 104, 106 secured
20 together by screws or the like 108 to form a chamber 110. The screws 108 also secure
21 a movable diaphragm 112 in place. The diaphragm 112 divides the chamber 110 into two
22 halves 110a, 110b.

1 The diaphragm 112 is oscillated in a back and forth manner by a motor 114.

2 The motor can be secured to the housing by bolts 116 or the like.

3 The motor 114 can be a stepper motor, which is one form of a linear
4 actuator, which has a shaft 118. The shaft 118 moves in and out of the motor 114 in the
5 axial direction without rotation. The shaft 118 is threaded, and is moved by a rotating
6 threaded ring 120, which is similar to a nut. Rotation of the ring 120 moves the shaft 118
7 linearly. In this manner, the shaft 118 can move the diaphragm 112 back and forth
8 essentially directly, without large, complex linkages.

9 The distal end of the shaft 118 can be guided by an opening 122 in an end
10 cap 124. The end cap 124 is secured by bolts 126.

11 The pump 16 also has vacuum outlets 128, 130 in the chamber 110, on
12 opposite sides of the diaphragm 112. The vacuum lines 18, 20 are connected to the
13 vacuum outlets 128, 130 through a common vacuum line 132, which accesses the lines
14 18, 20 equally and simultaneously through a port 134. Check valves such as duck bill
15 valves 136, 138 control the vacuum and pumping operation, and exhaust valves 140, 142
16 release the pressure created in the chamber halves 110a, 110b by the movement of the
17 diaphragm 112. However, some of the pressure generated by the diaphragm is
18 transmitted through the pressure lines 22, 24 to the collectors 12, 14. The pressure forces
19 the liners 58 against the breasts (see Fig. 6), which further stimulates release of milk.
20 While the vacuum is fairly continuous, though, the pressure pulsates. In fact, when the
21 diaphragm moves away from a pressure line 22, 24, air is drawn out and a partial vacuum
22 can be created.

1 The device is light weight, portable and compact because large motor
2 linkages are eliminated. Wear is also reduced by simplifying the power train in this
3 manner. The motor 114 can be any suitable device which creates a fairly self-contained
4 drive system which is relatively small in size and fairly quiet. In fact, the motor can be
5 an ordinary motor 114 with a threaded rotating shaft 146, as seen in Fig. 8. In that
6 embodiment, a fixed ring 148 is attached to the diaphragm. The ring 148 is also threaded,
7 so when the shaft 146 rotates forward and backwards, the diaphragm 112 moves back and
8 forth.

9 The motor can be controlled in any suitable manner, such as the control
10 system 150 shown in Fig. 9. An application specific integrated circuit or the like has a
11 microprocessor 152 and a ROM 154, programmed to cause a motor driver 156 to set the
12 desired rate of rotation and the direction of rotation of the motor. The rotation rate, as
13 well as the timing of the back and forth motion of the diaphragm, can be controlled in this
14 manner.

15 The diaphragm 112 can be any suitable configuration, such as that shown
16 in Fig. 1, which features a flat stiff middle section flanked by soft corrugations. Another
17 design is shown in Figs. 10 and 11, where a diaphragm 158 has a plurality of rings 160
18 joined by corrugations 162.

19 Fig. 12 is a perspective view of another embodiment of a collection vessel
20 as a flow-through bag 1000, which can be used to eliminate the need for sterilization of
21 the unit as assembled in Fig. 2. The bag portion can be molded with a grain which
22 facilitates easy removal. The flow-through bag 1000 includes a channel portion 1010 and

1 a milk-collecting bag portion 1015. The channel portion 1010 includes a flexible neck
2 1035 defining an internal channel. The flexible neck 1035 is configured to be inserted
3 into the milk outlet 38, through the vacuum/milk communication pipe 50, through the
4 inside of the liner 58, and out the breast cup assembly 28. The channel portion 1010
5 preferably includes a breast cup overlay (1315, Fig. 15) similar to that of the lines 58 at
6 the distal end of the neck 1035 to overlay the breast cup assembly 28 at the inlet 52. The
7 breast cup overlay 1315 may be maintained over the breast cup assembly 28 using the
8 locking mechanism previously described, a tie wire, rubber band or nothing. The upper
9 portion (1320, Fig. 15) of the neck 1010 is preferably shaped similar to the flexible liner
10 58, so that no buckling of material occurs. The channel portion 1035 may include
11 removable tape 1040 for clamping the neck 1035 and powder (not shown) to facilitate the
12 feeding of the flexible neck 1035 through the manifold 26 and breast cup assembly 28.

13 A vacuum spout and one-way valve molding 1045 is sealed within the
14 proximate end of the internal channel defined by the neck 1035. The molding 1045
15 effectively divides the internal channel into a first internal channel portion which is fed
16 through the breast cup assembly 28 and a second internal channel portion which forms
17 a skirt 1065 about the molding 1045.

18 The vacuum spout and one-way valve molding 1045 is shown in greater
19 detail in Fig. 13. The molding 1045 includes an annular ring 1055 sealed within the
20 proximate end of the internal channel defined by the neck 1035. The annular ring 1055
21 forms a vacuum/milk passage (aperture) 1060 therethrough. The molding 1045 further
22 includes a vacuum spout 1050 coupling the second internal channel portion to an

1 environment external the neck 1035. The vacuum spout 1050 enables vacuum pressure
2 from the vacuum pipe 46 to flow through the vacuum spout 1050, through the annular
3 ring 1055, and back up the vacuum/milk passage 1060 to the breast cup assembly 28.

4 The molding 1045 also includes two rigid plastic prongs 1070 directed
5 away from the neck 1035 for encouraging duckbill check valve action with the flexible
6 skirt 1065 that overhangs the annular ring 1055. Accordingly, vacuum pressure exerted
7 through the vacuum spout 1050 causes the flexible skirt 1065 to close about the two rigid
8 prongs 1070. Milk can still flow down the internal channel defined by the neck 1035,
9 through the vacuum/milk passage 1060, through the one-way valve 1065, and into the bag
10 portion 1005. Alternatively, the molding 1045 can alternatively include a ball valve, a
11 duck-bill check valve like valve 36, or any other one-way valve.

12 The bag portion 1005 includes a milk-collecting possibly disposable bag
13 1015, having a label area 1020 for a banner and/or note area for writing information such
14 as date and time of expression. The bag portion 1005 preferably includes a bag sealing
15 mechanism 1075 for enabling water-proof closure of the bag, and a water-and-air-tight
16 grain 1030 for enabling easy removal of the disposable bag 1015. Alternatively, the bag
17 1015 can be cut with scissors. Although not shown in Fig. 12, a clamping mechanism
18 (see Fig. 14) holds the annular ring 1055 within and against the milk-collecting bag 1015.

19 Fig. 14 is a perspective view of an example attachment for the flow-through
20 bag 1000. As illustrated, the neck 1035 is inserted up the vacuum/milk communication
21 pipe 50 of the manifold 26. The collecting vessel attachment mechanism, illustrated as
22 threading 1215, is shown as dangling out of the manifold 26.

1 In the embodiment illustrated in Fig. 14, the top end 1210 of the disposable
2 bag 1005 is inserted through a clamping mechanism 1205 and folded over. The clamping
3 mechanism 1205 preferably includes threading (not shown) to engage the threading 1215
4 of the manifold 26. When the clamping mechanism 1205 is attached to the threading
5 1215, the vacuum spout 1050 preferably is directed up the vertical vacuum pipe 46, the
6 annular ring 1055 abuts the edge of the threading 1215, and the molding 1045 forces the
7 channel portion 1010 against the disposable bag 1005 thereby creating a waterproof seal
8 and supporting the disposable bag 1005.

9 Fig. 15 illustrates another embodiment as a integral bag, neck and molding
10 unit 1300. As shown, the neck 1035 and bag 1015 are a single unit. The molding 1055
11 is sealed within the unit 1300 to form a vacuum/milk aperture 1060 dividing the internal
12 channel into a neck channel portion 1325 and a bag channel portion 1330. The molding
13 also includes a vacuum aperture 1310 from a point external the unit 1300 to the bag
14 channel portion 1330. The molding 1055 also includes a one-way valve, illustrated as a
15 duckbill check valve 1305. Although not shown, a connection mechanism is used to
16 maintain the molding 1055 against the vertical vacuum tunnel 46 of the manifold 26, so
17 that vacuum pressure can be exerted through the vacuum aperture 1310, through the
18 vacuum/milk aperture 1060 and onto the breast. Because the bag is a single unit, the
19 connection mechanism need not maintain a water-and-air-tight seal between the two bag
20 portions of Figs. 12-14.

21 In use, power is applied to the pump 16, and the expressors 12, 14 are
22 placed over the breasts. The vacuum created by the pump 16 secures the expressors 12,

1 14 on the breasts and helps draw milk from the breasts. The pulsating air massages the
2 breast to stimulate milk production, and reduces the amount of vacuum needed to collect
3 the milk.

4 The vacuum in each expressor 12, 14 can be adjusted individually by
5 turning the thumbwheels 88, without pressing pins 90 down. To release the vacuum, one
6 or both of the pins 90 is pressed down. The device can be easily disassembled without
7 tools, cleaned and reassembled.

8 The many advantages of this invention are now apparent. Breast pumping
9 is more comfortable because the user can individually control the vacuum supplied to
10 each breast. Release is also more comfortable because the vacuum can be released before
11 removal. Cleaning is more convenient because milk does not enter the vacuum lines.
12 Moreover, the entire collector can be easily disassembled for cleaning and reassembled
13 without tools. The bosses in the expressors protect the end of the nipple from irritation,
14 which is comfortable. Moreover, the entire pump is small, lightweight and relatively
15 quiet.

16 While the principles of the invention have been described above in
17 connection with a specific apparatus and applications, it is to be understood that this
18 description is made only by way of example and not as a limitation on the scope of the
19 invention. For example, various aspects of the invention could be used to milk animals,
20 as well as humans.

WHAT IS CLAIMED IS:

1 1. A device for simultaneously expressing milk from first and second
2 breasts comprising:

3 a first expressor, said first expressor having a first cup for fitting on
4 the first breast, a first cup outlet and a first collection vessel;

5 a second expressor, said second expressor having a second cup for
6 fitting on the second breast, a second cup outlet and a second collection vessel;

7 a pump operably connected to said first expressor and second
8 expressor, said pump creating a vacuum at said first and second outlets which engages
9 and expresses the milk from the first and second breasts, the milk then draining into said
10 first and second collection vessels;

11 a first vacuum adjustment on said first expressor;

12 a second vacuum adjustment on said second expressor; and

13 at least one vacuum release on said first or said second expressor;

14 whereby the vacuum at said first and second expressors can be
15 individually adjusted and mutually released.

1 2. The device of claim 1 comprising a first vacuum release on said first
2 expressor and a second vacuum release on said second expressor, wherein the vacuum at
3 both said first and second expressors is released by said first vacuum release or said
4 second vacuum release.

5 3. The device of claim 1 wherein

6 said pump creates the vacuum at said first outlet through a first
7 vacuum line secured on one end to said first expressor, said first expressor having a first
8 vacuum port between said first vacuum line and said first outlet,

9 said first vacuum adjustment including a first pin which is threaded
10 into an orifice in said first expressor such that an end of said first pin enters said first
11 vacuum port and regulates the vacuum at said first outlet.

1 4. The device of claim 3 wherein said first pin is spring-loaded to open
2 said first vacuum port to the extent allowed by an adjustment of said pin in said threads
3 when said first pin is released, said first pin opening said vacuum port when said first pin
4 is pressed so that said vacuum is lost.

1 5. A device for expressing milk from a breast comprising:

2 an expressor, said expressor having a cup for fitting on the breast and
3 a cup outlet;

4 a pump connected to said expressor, said pump creating a vacuum
5 at said cup outlet which engages and expresses the milk from the breast;

6 a vacuum adjustment for said expressor; and

7 a vacuum release for said expressor;

8 whereby the vacuum at said expressor can be adjusted and released.

1 6. An air pump comprising a movable diaphragm in a chamber, at least
2 one output port, a shaft which passes through said diaphragm and a motor which moves
3 said diaphragm axially, said motor rotating around the axis of said shaft.

1 7. An air pump comprising a movable diaphragm in a chamber, at least
2 one output port, and a motor having a shaft which moves axially, said shaft being
3 connected to said diaphragm to oscillate said diaphragm in a back and forth motion.

1 8. An air pump comprising a movable diaphragm in a chamber, at least
2 one output port, and a motor having a rotating shaft, said shaft being in threaded
3 engagement with said diaphragm so that rotation of said shaft in forward and reverse
4 directions moves said diaphragm back and forth in said chamber.

1 9. A device for expressing milk from a breast comprising
2 a manifold having a vacuum path, said vacuum path having an inlet,
3 an outlet and a midsection between said inlet and said outlet, said midsection being
4 beneath said inlet and said outlet in use,
5 a vacuum source connected to said inlet,
6 a breast cup connected to said outlet and adapted for securement to
7 the breast,
8 a milk collector having a collector inlet operatively connected to said
9 midsection of said vacuum path, and

10 a check valve between said vacuum path and said milk collector,
11 whereby milk which is drawn from the breast by said vacuum source
12 falls through said check valve and into said milk collector by force of gravity and is
13 substantially not drawn through said vacuum inlet.

1 10. Apparatus for expressing milk from a breast comprising
2 a milk collector unit having manifold, the manifold having a vacuum
3 path and a pulsating pressure path,
4 a collection vessel operatively connected to said vacuum path,
5 a cup assembly, said cup assembly having a housing having an inlet
6 and an outlet, a pad located in the input end of said housing, and a liner extending from
7 said housing inlet to said housing outlet, said liner being secured to said housing to form
8 a space between said housing and said liner which is in communication with said
9 pulsating pressure path, pressure in said pulsating path pushing said liner inwardly within
10 said housing, and
11 a hollow boss which prevents the pressure from pushing a portion
12 of said liner inwardly.

1 11. The apparatus of claim 10 wherein said manifold assembly includes
2 a manifold to which said collection vessel is secured, and a removable cap, said cup
3 assembly being secured to said manifold assembly by both said manifold and said cap.

1 12. The apparatus of claim 11 wherein said vacuum path begins in said
2 cap and passes through said manifold to said cup assembly, and
3 said pulsating pressure path passes through said cap to a pressure
4 port in said cup assembly, said pressure port being in communication with said space
5 between said housing and said liner.

1 13. A breast cup assembly comprising
2 a hollow housing having a milk inlet, a milk outlet, and an air
3 pulsation port,
4 a pad located in said inlet, and
5 a liner extending from said inlet to said outlet, said liner being sealed
6 to said inlet and outlet by a press fit connection, said liner forming a space between said
7 housing and said liner, said space being in communication with said air pulsation port.

1 14. A milk-collecting flow-through bag, comprising:
2 a neck portion defining an internal channel for passing milk;
3 a device defining a first aperture for dividing the internal channel
4 into a first internal channel portion and into a second internal channel portion, and a
5 second aperture for coupling the second internal channel portion to an environment
6 external to the neck portion; and
7 a milk-collecting bag portion coupled for receiving milk from the
8 second internal channel portion.

1 15. The bag of claim 14, wherein the neck includes a breast cup overlay
2 at the distal end for overlaying a breast cup.

1 16. The bag of claim 14, comprising two rigid prongs directed towards
2 the bag for causing duck-bill check valve action.

1 17. The bag of claim 14, wherein the milk-collecting bag portion
2 includes grain for easy removal.

1 18. The bag of claim 14, wherein the milk-collecting bag portion
2 includes a device for sealing the bag closed.

1 19. The bag of claim 14, further comprising an attachment mechanism
2 for coupling the bag portion to the breast cup.

1 20. A milk-collecting flow-through bag, comprising:
2 means defining an internal channel for passing milk;
3 means defining a first aperture for dividing the internal channel into
4 a first internal channel portion and into a second internal channel portion, and a second

aperture for coupling the second internal channel portion to an environment external to the neck portion; and

means for receiving milk from the second internal channel portion.

21. An article of manufacture, comprising:

a framework defining a vacuum/milk communication aperture; and

a vacuum inlet coupled to the framework defining a vacuum

aperture.

22. The article of claim 20, wherein the vacuum inlet includes a spout.

ABSTRACT

1 A device for expressing milk from one or more breasts has
2 at least one, and preferably two expressors and a pump. The expressors
3 each have a cup for fitting on the breasts and a cup outlet to which a
4 vacuum created by the pump can be connected. In use, the vacuum
5 expresses the milk from the breast. The device has a vacuum adjustment
6 and a vacuum release on each expressor. In this manner, the vacuum can
7 be individually adjusted and released at the expressors. The pump includes
8 a movable diaphragm in a chamber. The diaphragm is oscillated back and
9 forth by a linear actuator motor such as a stepper motor. The motor has a
10 shaft which moves back and forth axially, for direct linkage to the
11 diaphragm, so that the size and weight of the pump are reduced. The
12 expressors have a removable cap and removable cup assembly, and the cup
13 assembly has a positively sealed liner, for easy disassembly and cleaning.

FIG. 1

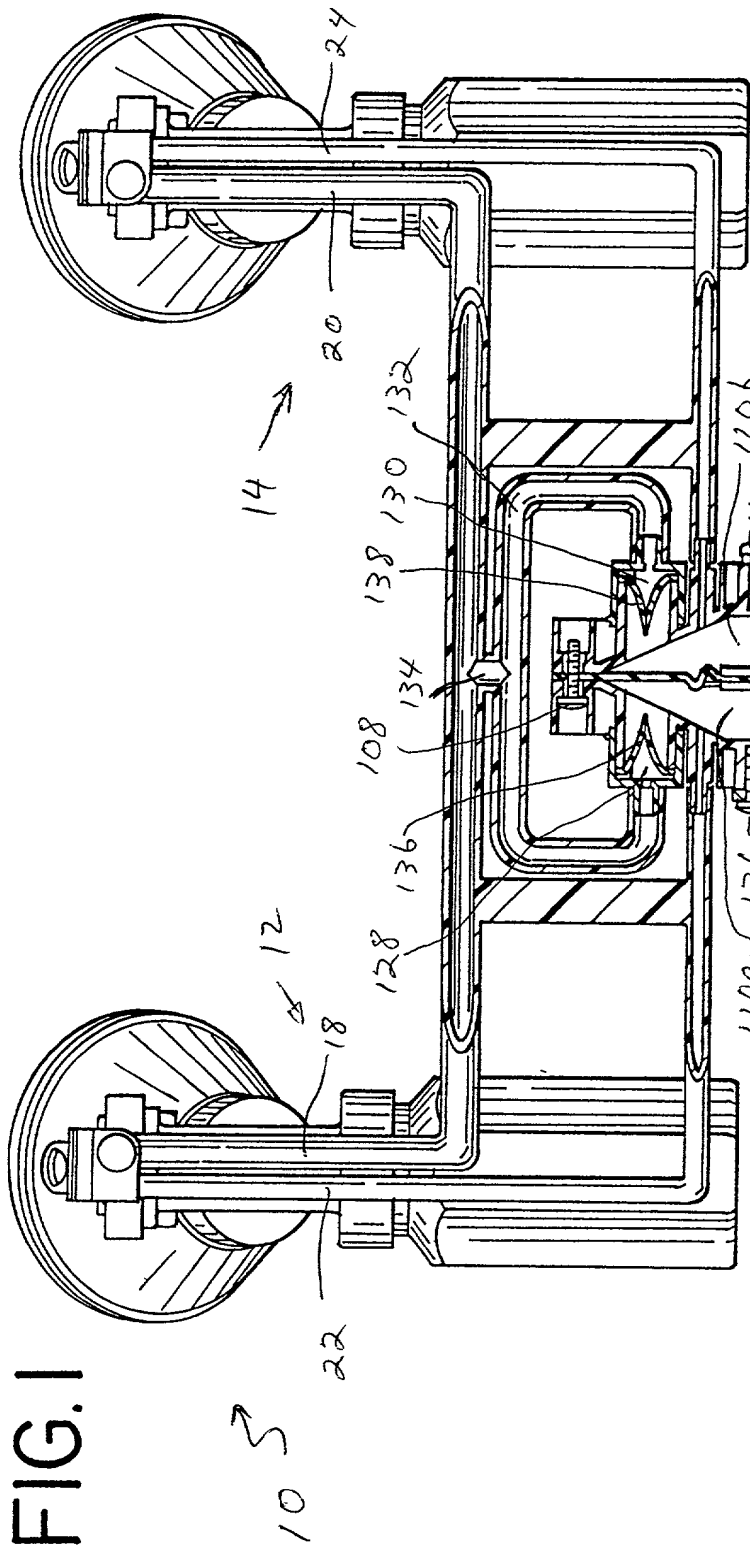


FIG. 8

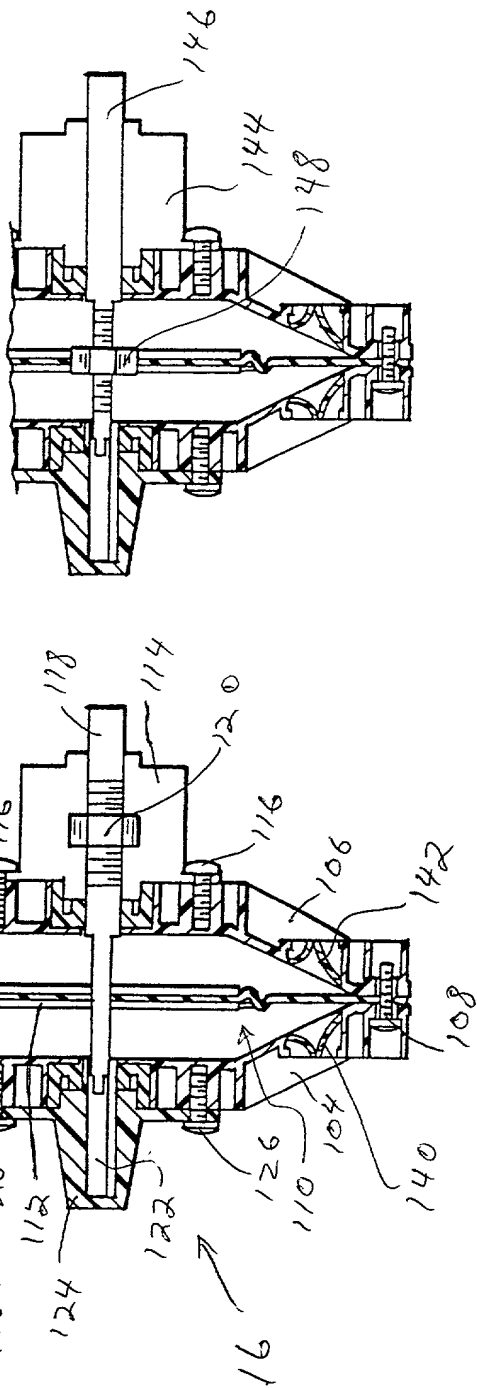


FIG.3

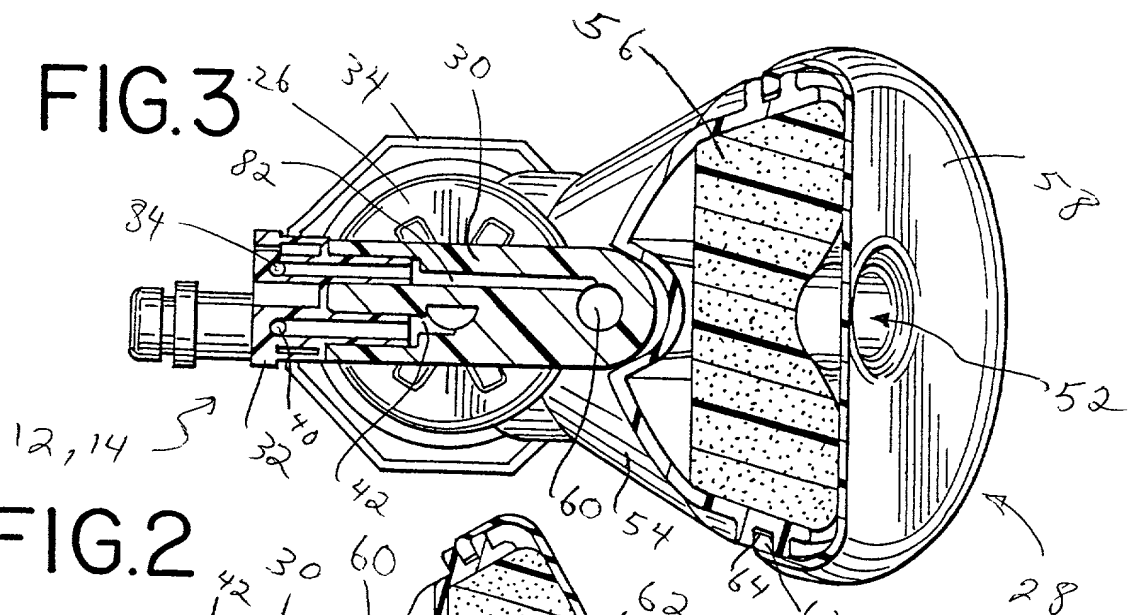


FIG.2



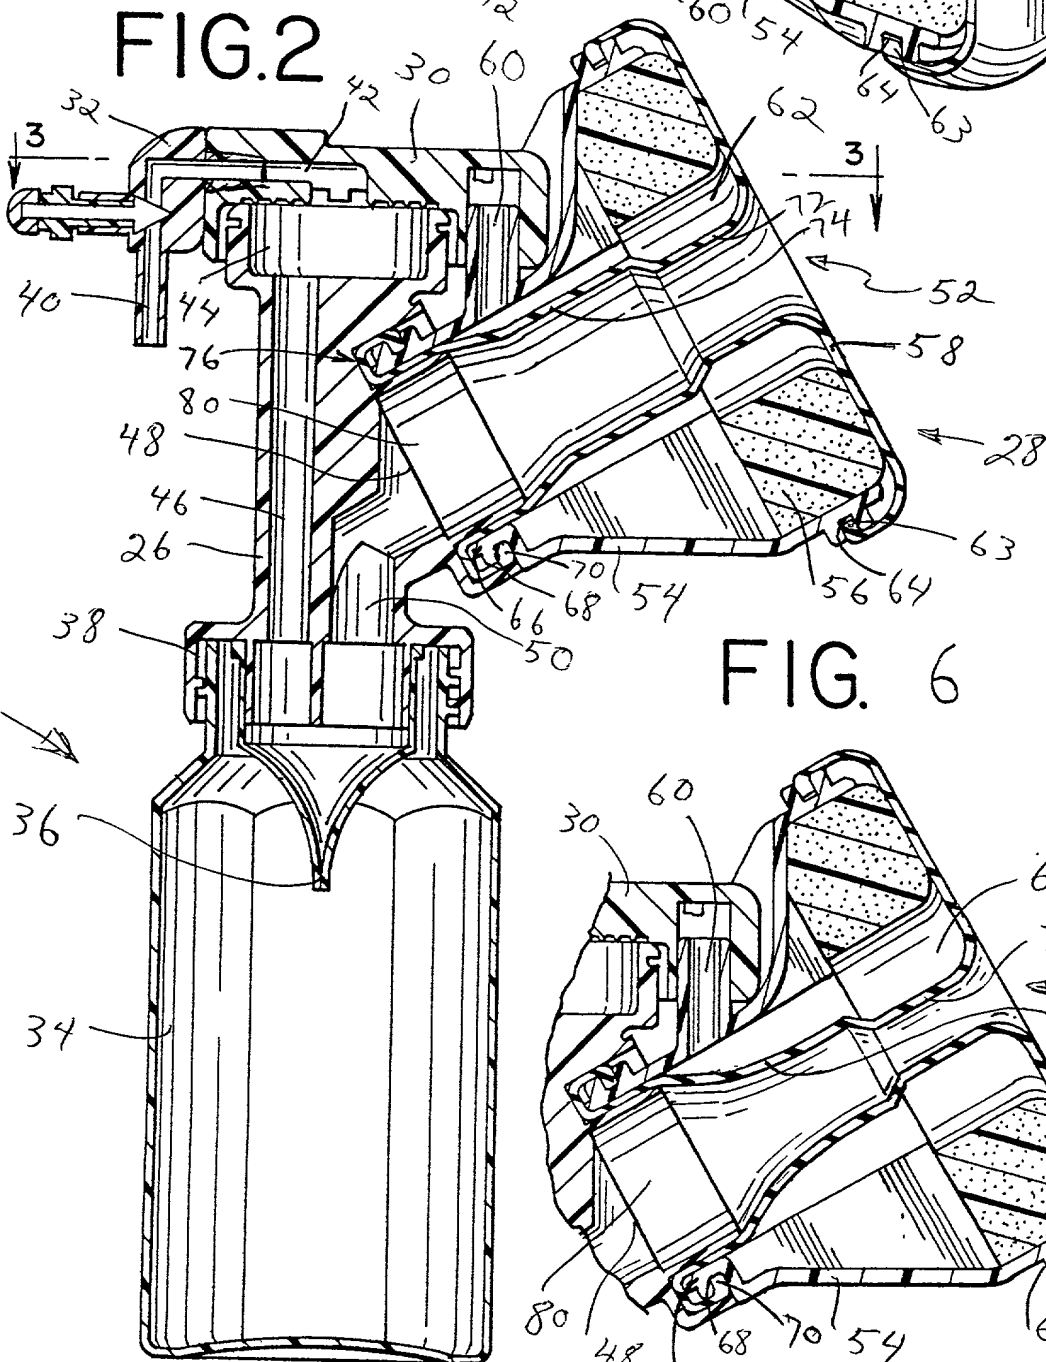






FIG. 6

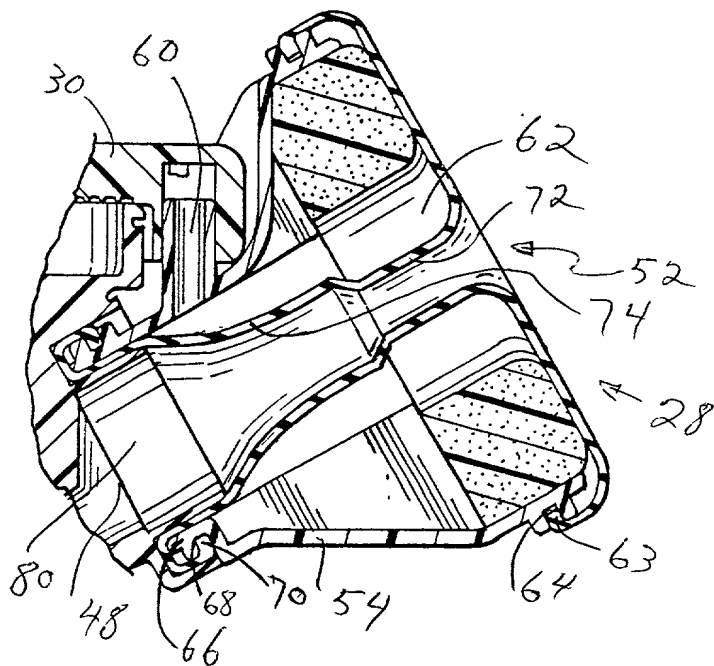


000130-T20T6560

FIG. 5

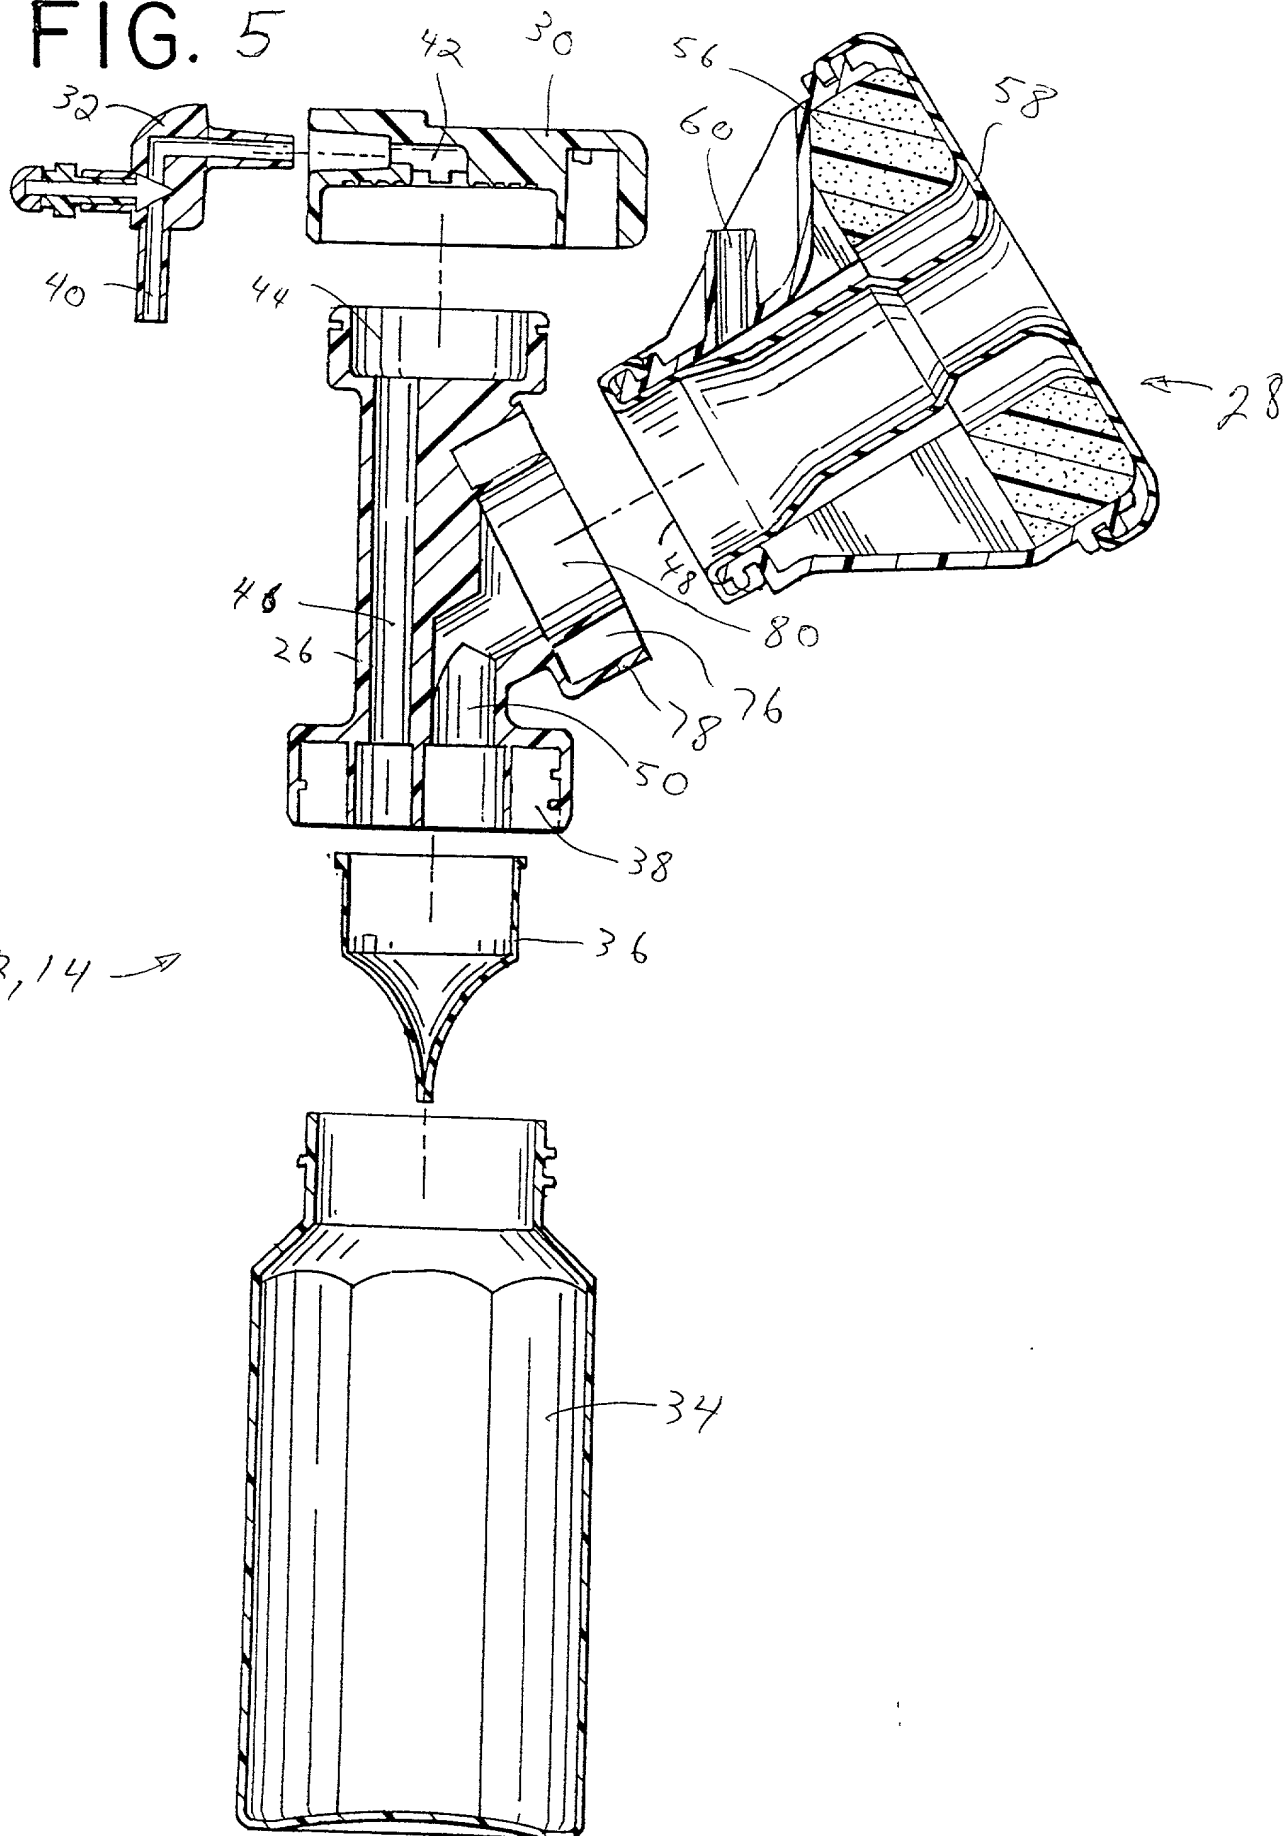

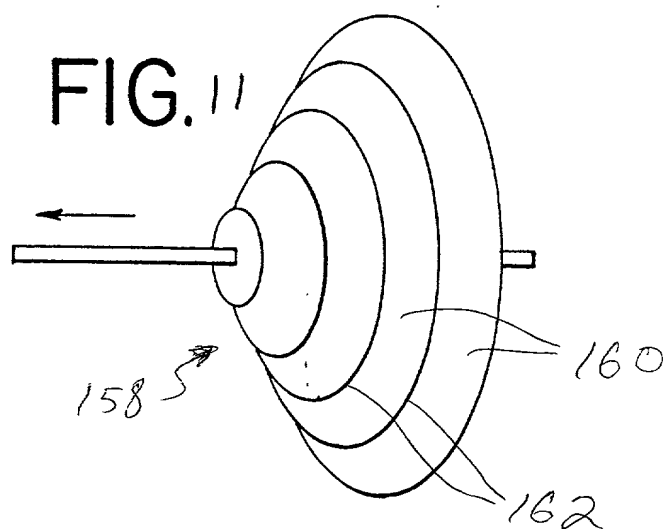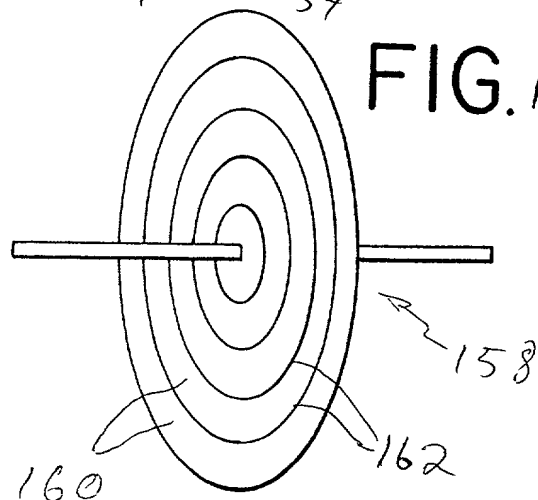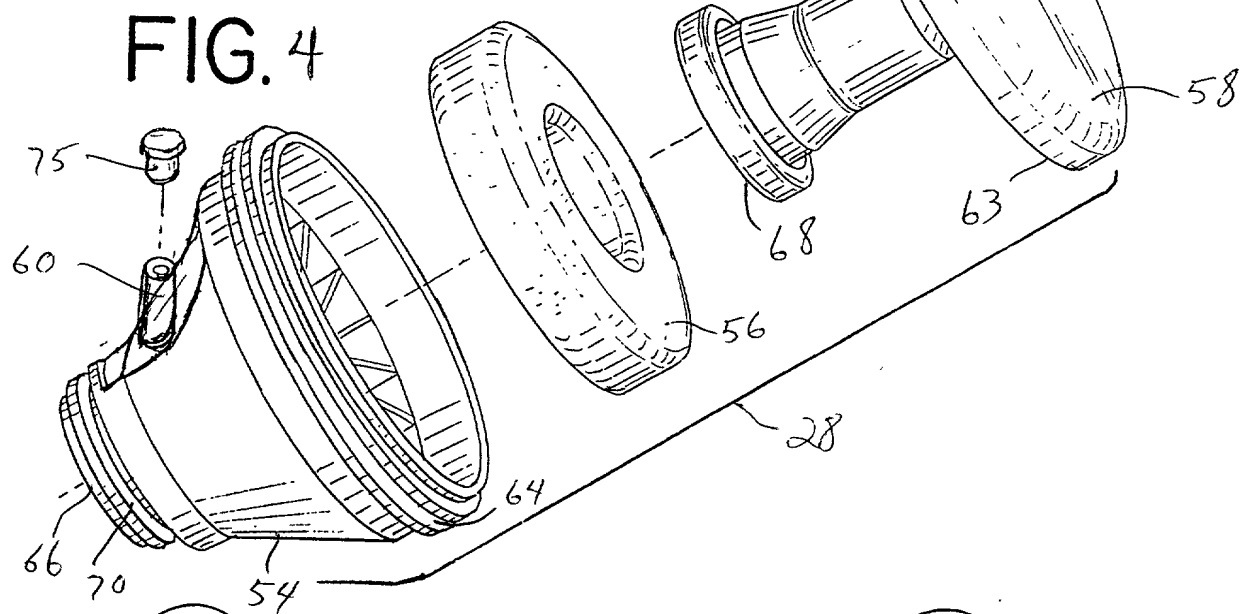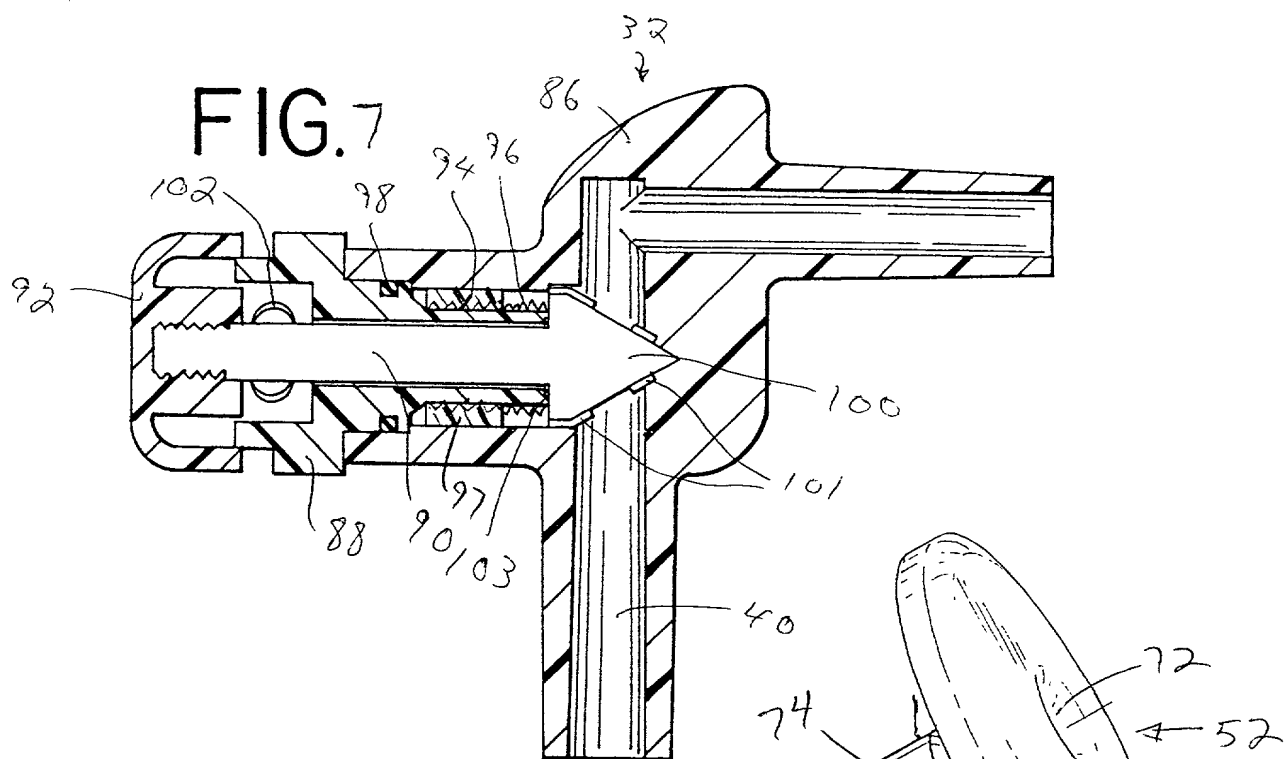

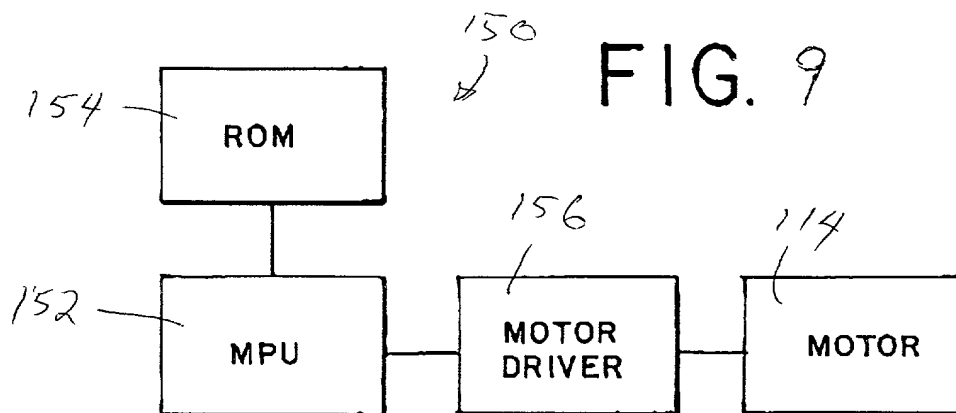

1005



	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

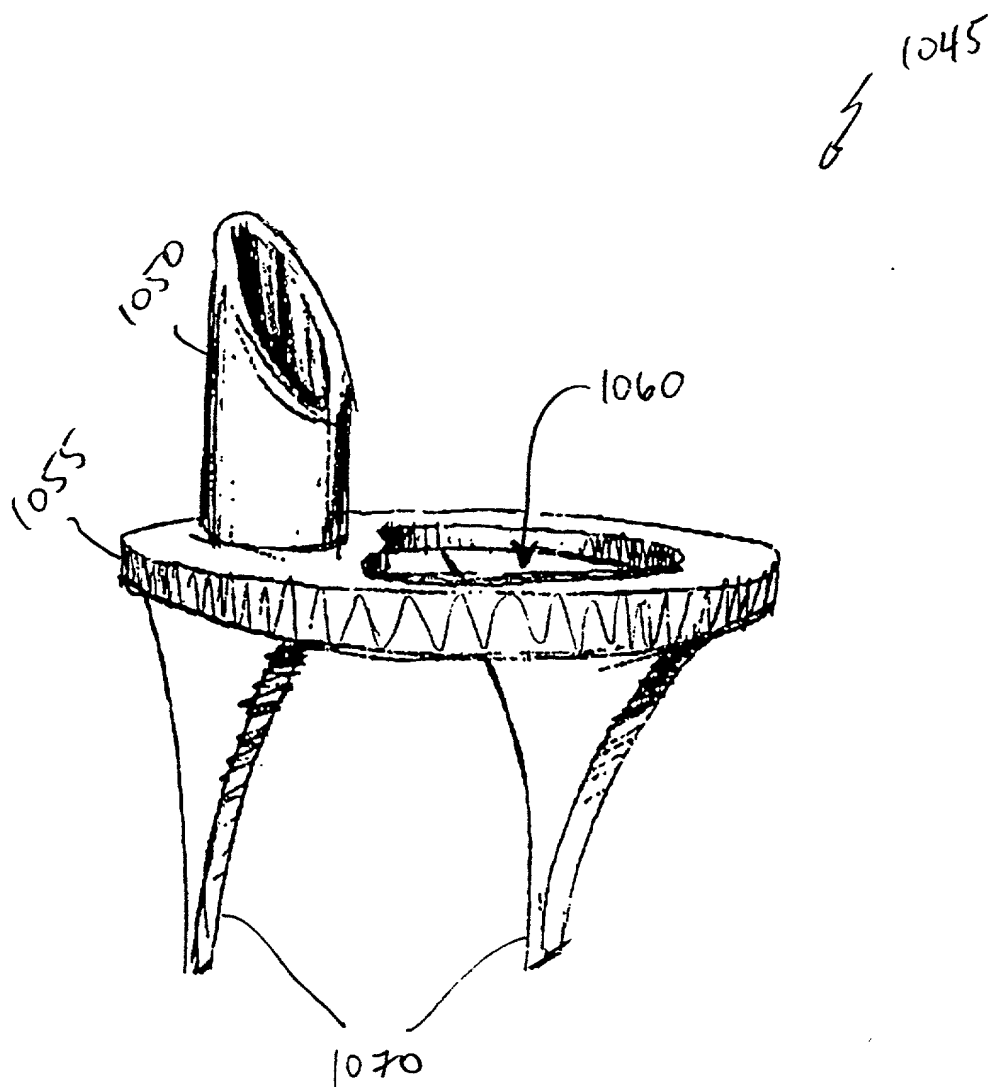


FIG. 13

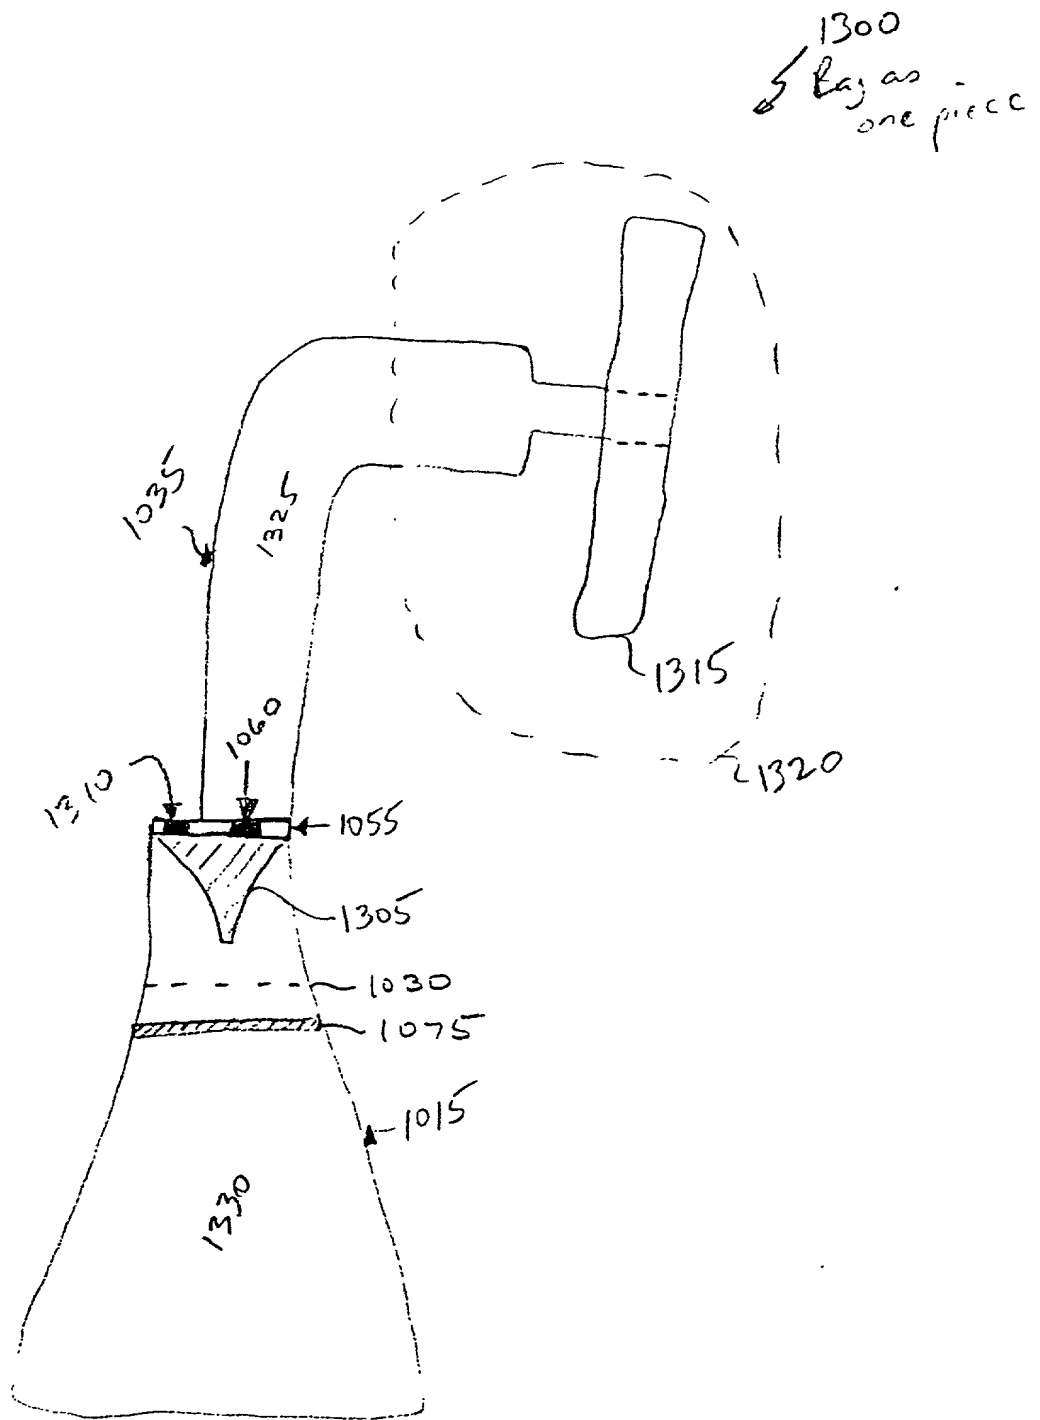


FIG. 15

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare:

That my residence, post office address and citizenship are as stated below next to my name:

That I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

APPARATUS FOR EXPRESSING MILK

the specification of which
(check one)

☐ is attached hereto.

☐ was filed on _____ as
Application Serial No. _____
and was amended on _____
(if applicable)

That I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

That I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

That I hereby claim foreign priority benefits under Title 35, United States Code, §119 and §172 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year)	<input type="checkbox"/> <input type="checkbox"/> Yes No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year)	<input type="checkbox"/> <input type="checkbox"/> Yes No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year)	<input type="checkbox"/> <input type="checkbox"/> Yes No

That I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

United States Application(s)

60/140,902 (Appl. Ser.No.)	June 23, 1999 (Filing Date)	Pending (provisional) (Status) (patented, pending, abandoned)
_____ (Appl. Ser.No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

That all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

I hereby appoint the following attorneys, with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and request that all correspondence and telephone calls in respect to this application be directed to Patrick G. Burns, Esq., GREER, BURNS & CRAIN, LTD., Suite 8660 - Sears Tower, 233 South Wacker Drive, Chicago, Illinois 60606, Telephone No. (312) 993-0080:

<u>Attorney</u>	<u>Registration No.</u>
Roger D. Greer	26,174
Patrick G. Burns	29,367
Lawrence J. Crain	31,497
Steven P. Fallon	35,132
Paul G. Juettner	30,270
Thomas R. Juettner	16,158
James K. Folker	37,538
Jonathan D. Feuchtwang	41,017
B. Joe Kim	41,895
Carole A. Mickelson (Agent)	30,778

Full name of sole or one
joint inventor:

Bruce McKendry

Inventor's signature:

Date:

Residence and Post Office
Address:

c/o Whittlestone, Inc.

601 Stone Road

Benicia, CA 94510

Citizenship:

United States

Full name of additional
joint inventor, if any:

Jim Mielke

Inventor's signature:

Date:

Residence and Post Office
Address:

c/o Mielke Product Design

1189 Park Avenue

San Jose, CA 95126

Citizenship:

United States

Full name of additional
joint inventor, if any:

Briant Benson

Inventor's signature:

Date:

Residence and Post Office
Address:

c/o Bentec Medical

1380 East Beamer Street

Woodland, CA 95776

Citizenship:

United States

Full name of additional
joint inventor, if any:

Bruce Fields

Inventor's signature:

Date:

Residence and Post Office
Address:

c/o Bentec Medical

1380 East Beamer Street

Woodland, CA 95776

Citizenship:

United States

Address for Correspondence:

GREER, BURNS & CRAIN, LTD.
Suite 8660 - Sears Tower
233 South Wacker Drive
Chicago, Illinois 60606